



WELDING ENGINEERS (NZ) LTD
PH : 09 634 1949 email : sales@wenzl.co.nz

BINZEL Air Cooled GRIP Welding Torches Rating 220 A up to 320A

- Ergonomic short handle with "GRIP" - for best accessibility
- "GRIP", soft components on the handle and thumb rest - positive handling even in extrem circumstances
- Ball joint with optimal turning radius - perfect handling
- Optimum cooling of the torch - extending torch life
- BIKOX® R air cooled torches - high flexibility even at low temperatures, extremely UV resistant, considerably increased temperature stability and tensile strength
- Timesaving torch changeover due to the ABICOR BINZEL central connector



MB GRIP 24 KD

Technical data [EN 60 974-7]:

Rating: 250 A CO₂
220 A Mixed Gases
M21 [DIN EN 439]
Duty cycle: 60%
Wire size: 0.8-1.2 mm

MB GRIP 26 KD

Technical data [EN 60 974-7]:

Rating: 270 A CO₂
240 A Mixed Gases
M21 [DIN EN 439]
Duty cycle: 60%
Wire size: 0.8-1.2 mm


MB GRIP 36 KD

Technical data [EN 60 974-7]:

Rating: 320 A CO₂
290 A Mixed Gases
M21 [DIN EN 439]
Duty cycle: 60%
Wire size: 0.8-1.2 mm



Binzel MIG Torches - Common Wear Parts for MB24/26/36

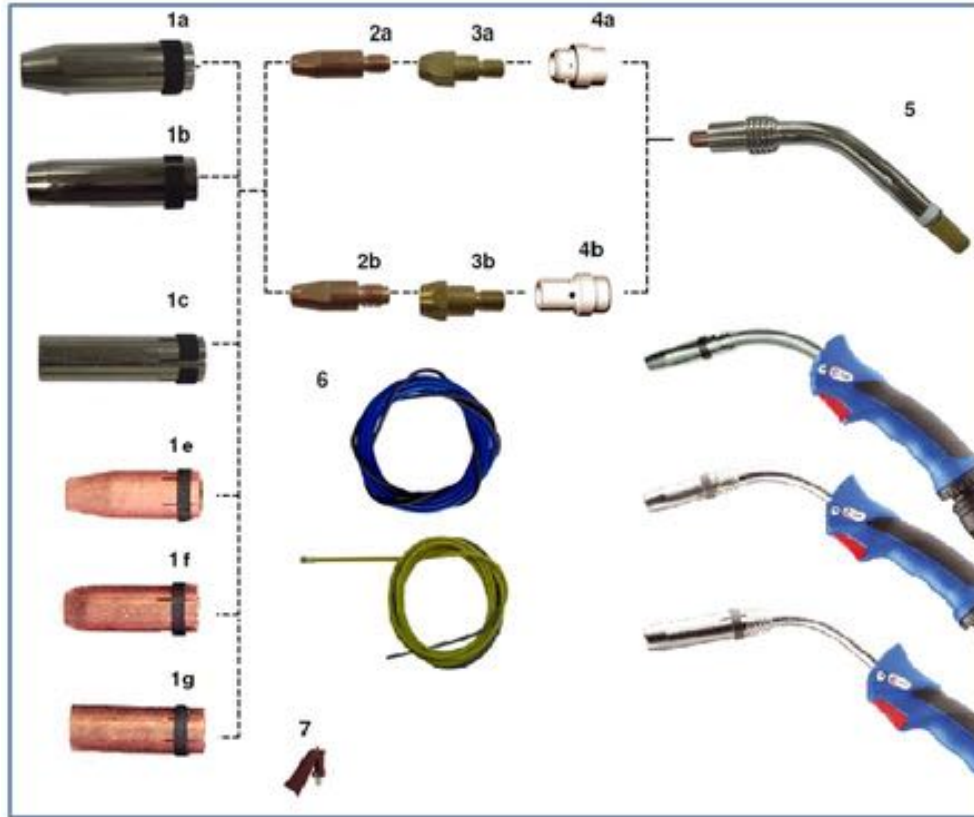

No.	Description for Binzel Torch	WENZL Part No.	Spec./Size
	Tapered Gas Nozzle MB24	BIN 24NOZZTA	10mm
	Conical Gas Nozzle MB24	BIN 24NOZZCO	12mm
	Cylindrical Gas Nozzle MB24	BIN 24NOZZCY	17mm
1a	Tapered Gas Nozzle MB36	BIN 36NOZZTA	12mm
1b	Conical Gas Nozzle MB36	BIN 36NOZZCO	16mm
1c	Cylindrical Gas Nozzle MB36	BIN 36NOZZCY	17mm
1e	Tapered Gas Nozzle MB26	BIN 501NOZZTA	14mm
1f	Conical Gas Nozzle MB26	BIN 501NOZZCO	16mm
1g	Cylindrical Gas Nozzle MB26	BIN 501NOZZCY	20mm
2a	Contact Tip (E-CU) for MB24 / MB26 / MB36	BIN M606	0.6mm
	m6 x 28 Pkts of 10	BIN M608	0.8mm
		BIN M609	0.9mm
		BIN M610	1.0mm
		BIN M612	1.2mm
		BIN M614	1.4mm
2b	Contact Tip (E-CU) for MB26 / MB36	BIN M809	0.9mm
	m8 x 30 Pkts of 10	BIN M810	1.0mm
		BIN M812	1.2mm
		BIN M814	1.4mm
		BIN M816	1.6mm
		BIN M820	2.0mm
		BIN M824	2.4mm
	Contact Tip (CuCrZr) for MB24 / MB26 / MB36	BIN M608C	0.8mm
	m6 x 28 Pkts of 10	BIN M609C	0.9mm
		BIN M610C	1.0mm
		BIN M612C	1.2mm
	Contact Tip (CuCrZr) for MB26 / MB36	BIN M808C	0.8mm
	m8 x 30 Pkts of 10	BIN M809C	0.9mm
		BIN M810C	1.0mm
		BIN M812C	1.2mm
		BIN M816C	1.6mm

No.	Description for Binzel Torch	WENZL Part No.	Spec./Size
	Contact Tip (E-CU) for Alu wire	BIN M610A	1.0mm
	MB24 / MB26 / MB36	BIN M612A	1.2mm
	m6 x 28 Pkts of 10		
	Contact Tip (E-CU) for Alu wire	BIN M812A	1.2mm
	MB26 / MB36	BIN M816A	1.6mm
	m8 x 30 Pkts of 10		
3a	Contact Tip Holder MB24	BIN 24TIPH	m6/m6/26mm
	Contact Tip Holder MB26	BIN 26TIPH	m8/m6/22mm
3b	Contact Tip Holder MB36	BIN 36TIPH	m8/m6/26mm
4a	Standard Gas Diffuser MB24	BIN 24DIFF	White ceramic 20mm
	Standard Gas Diffuser MB26	BIN 26DIFF	White ceramic 29mm
4b	Standard Gas Diffuser MB36	BIN 36DIFF	White ceramic 32mm
5	Swan Neck MB24	BIN 24SWAN	50 deg.
	Swan Neck MB26	BIN 26SWAN	50 deg.
	Swan Neck MB36	BIN 36SWAN	50 deg.
6	Blue Core Liner	LINERB3	3m x 0.9mm
6	Blue Core Liner	LINERBL	4m x 0.9mm
	Red Core Liner	LINERR3	3m x 0.9 - 1.2mm
	Red Core Liner	LINERRD	4m x 0.9 - 1.2mm
	Plain Core Liner	LINERST	4m x 1.0 - 1.2mm
	Teflon Liner (Alu or S/S)	LINERT3	3m x 0.9 - 1.2mm
	Teflon Liner (Alu or S/S)	LINERT4	4m x 0.9 - 1.2mm
	Teflon Liner (Alu or S/S)	LINERT8	8m x 0.9 - 1.2mm
6	Yellow Liner	LINERYL	4m x 1.6mm
7	Micro Switch	MICRO	

